



Injection Transformer

Introduction

The TBJT02 is a wideband injection transformer for control loop stability measurements. It provides galvanic isolation between the swept signal source and the control loop. The injection transformer is internally terminated with a 5 Ohm resistor and protected with a 100 mA fuse. The usable frequency range is 1 Hz to 7 MHz.



Picture 1: TBJT02 injection transformer

Specification

Compliance: RoHS Termination resistor: 5Ω

Fuse: 100 mA (Littlefuse 0451.100MRL); secondary (output) side

Turns ratio: 1:1

Characterized freq. range: 1 Hz to 100 MHz Usable frequency range: 1 Hz – 7 MHz 3 dB frequency range: 2 Hz - 3 MHz typ.

Insertion loss (S21): 16 dB typ.

Capacitance: 310 pF @ 1 Khz; primary to secondary winding

DC saturation current: 12 mA

Max. voltage rating: 600V CAT II; primary to secondary winding

 50Ω BNC female, Input connector:

Output connector: 4 mm safety banana jacks, 20 mm spacing

Operating temp. range: $0^{\circ}C - 60^{\circ}C$

Enclosure dimensions: 70 mm x 60 mm x 140 mm

Weight: 300 g







Injection Transformer

3 Frequency response


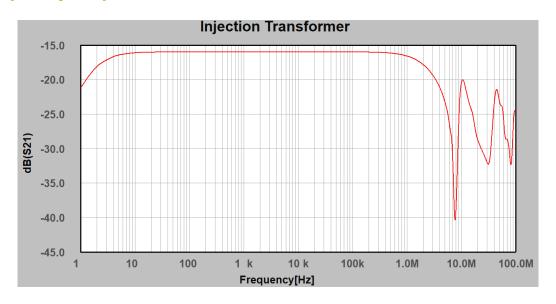



Figure 1: typical insertion loss

4 Application

The control loop is commonly broken at the point between the amplifier output and the input of the feedback network:

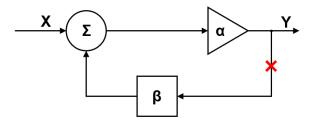

The isolation transformer is inserted into the control loop and connected to the Bode-Analyzer:

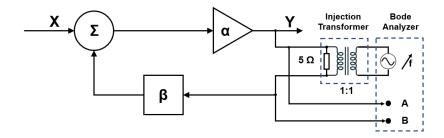







Injection Transformer

5 Ordering Information

Part Number	Description
TBJT02	1 Hz – 5 MHz injection transformer

6 History

	Version	Date	Author	Changes
Ī	V 1.0	18.2.2023	Mayerhofer	Creation

www.tekbox.com

TekBox Digital Solutions Vietnam Pte. Ltd.

Factory 4, F4, Lot I-3B-1, Saigon Hi-Tech Park, Tan Phu Ward, District 9, Ho Chi Minh City, Vietnam

