


Coupling-/Decoupling Network CDN 2402 / 2410

Main	48V / 240 V 6A AC/DC
Surge	1.2/50 μs: 2.5 kV
Burst	5/50 ns: 2.5 kV

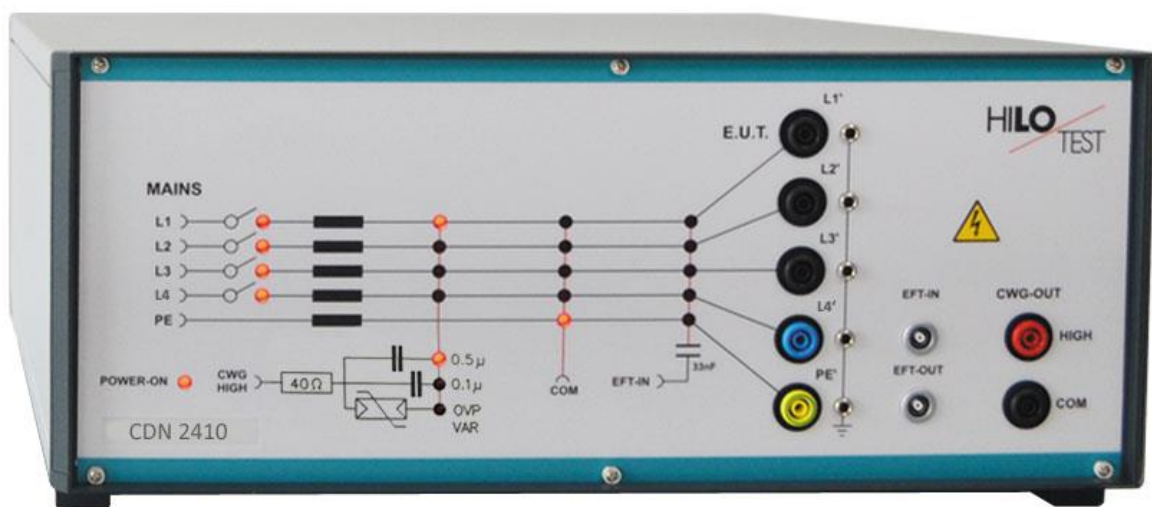

According to
IEC 61000-4-4
IEC 61000-4-5
IEEE 587

The capacitive Coupling-/Decoupling Networks CDN 2402/2410 are used in combination with the CE-TESTER and allows superimposition of surge and burst test pulses to up to four I/O signal lines.

The test set-up is suitable for surge immunity testing of electronic systems and devices according to IEC 61000-4-4, IEC 61000-4-5 and IEEE 587.

The CDN 2402/2410 contain the coupling impedances 0.1 μ F/ 0.5 μ F/ Varistor + 40 Ω for the surge generator and 33 nF for the burst generator and four decoupling impedances L=20 mH.

Coupling mode can be selected from the front panel of the generator. Remote control commands are transmitted from the generator to the Coupling-/Decoupling Network by use of a control cable.

Sales Partner:



ABSOLUTE EMC Lic.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

Page 1 of 2
www.hilo-test.de

Typical configurations:

Multi CE5 1 + CDN 2410: for testing I/O lines L1, L2, L3, L4, PE



Technical specification:	CDN 2402	CDN 2410
Coupling-/Decoupling Network for I/O lines	L1, L2, L3, L4, PE	
Nominal voltage AC/DC	48 V	240V
Nominal current AC/DC	6 A	
max. test voltage Surge, 1.2/50 μ s:	2.5 kV	
max. test voltage Burst, 5/50 ns:	2.5 kV	
Coupling impedance for the surge generator	0.1 μ F / 0.5 μ F + 40 Ω Varistor + 40 Ω	
Coupling impedance for the burst generator	33 nF	
Coupling mode, selectable, for the surge generator	line to line via 0.1/0.5 μ F or line to ground via 0.1/0.5 μ F	
Coupling mode, selectable, for the burst generator	line to ground via 33 nF	
Burst Input	Fischer	
Surge Input	4 mm Bush	
Mains power	90V - 264V , 50/60 Hz	
Dimensions: desk top case W * H * D	450*180*500 mm ³	
Weight	15 kg	25 kg

Sales Partner:



ABSOLUTE EMC Lic.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

Page 2 of 2
www.hilo-test.de