
XF-U 2.5-1

H-Field Probe 30 MHz up to 6 GHz

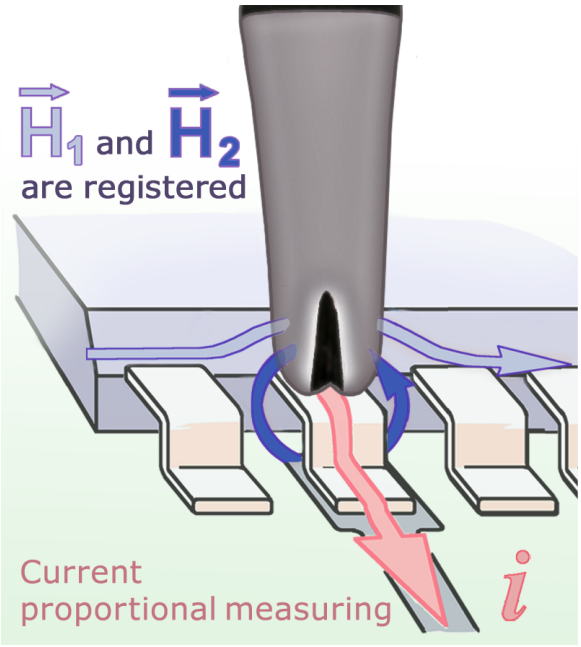

Short description

The XF-U 2.5-2 near-field probe is designed for the selective measurements of RF currents in conducting paths, component connectors, SMD components, and IC pins. The probe head has a magnetically active gap with an approx. width of 0.5 mm. To use, the head should be positioned directly onto the measured object.


The XF-U 2.5-2 is a passive near-field probe that is designed for SMD components (pins). The near-field probe is small and handy. It has a current attenuating sheath and, therefore, is electrically shielded. It can be connected to a spectrum analyzer or an oscilloscope with a 50 Ω input. The H-field probe has an internal terminating resistance.

Technical parameters


Frequency range	30 MHz ... 6 GHz
Resolution	≈ 0.5 mm
Probe head dimensions	Ø ≈ 4 mm
Connector - output	SMA, female, jack
Weight	15 g

Sales Partner:
ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada
absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com


Frequency response [dBµV] / [dBµA/m]

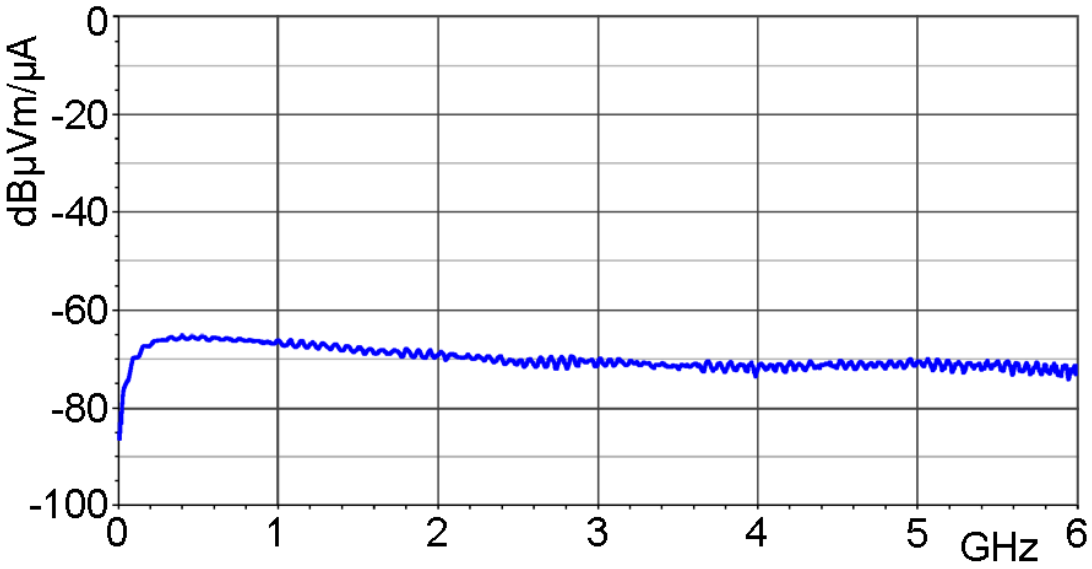


H-field correction curve [dBµA/m] / [dBµV]

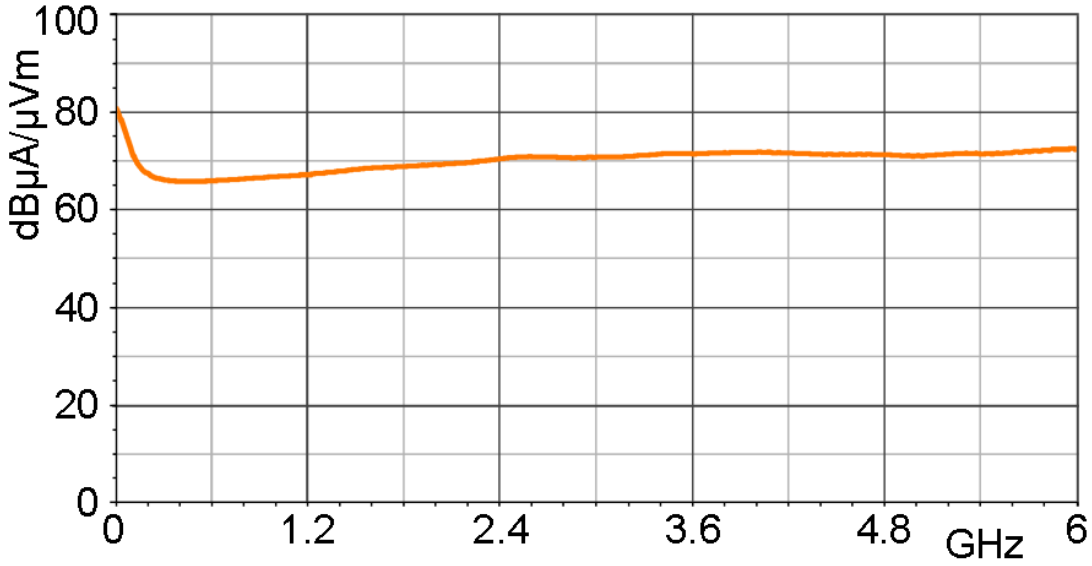

Current correction curve [dBµA] / [dBµV]

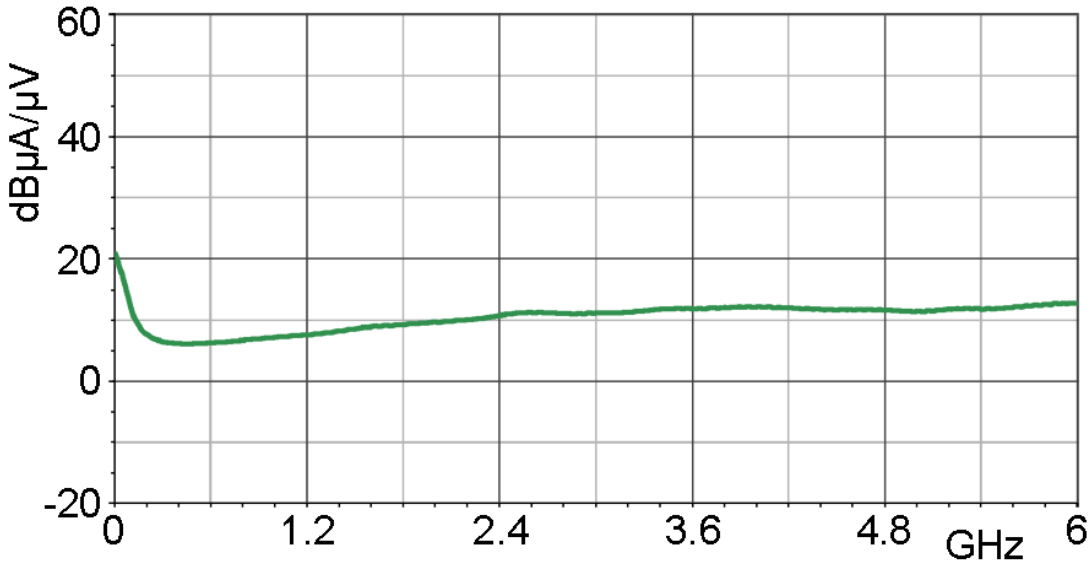

Measuring principles

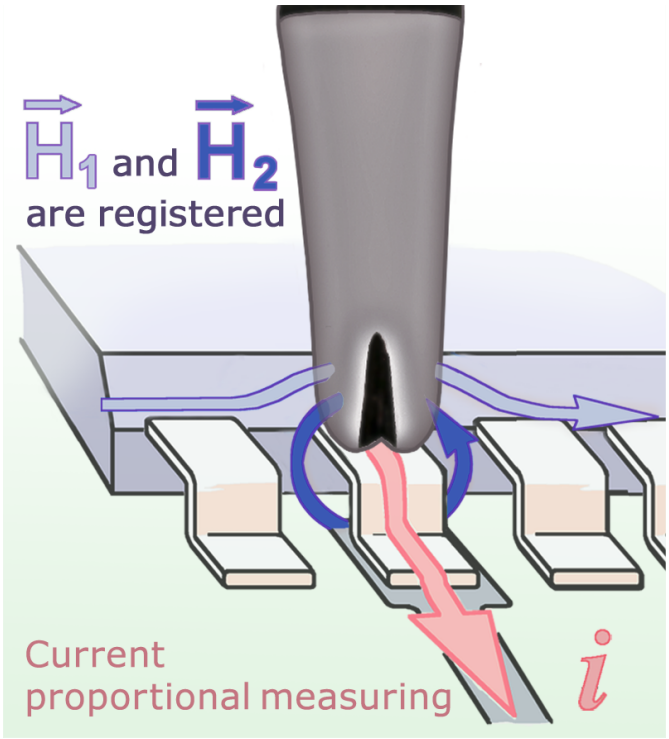

XF-U 2.5-1

H-Field Probe 30 MHz up to 6 GHz

LANGER EMV-Technik

Probe head



Sales Partner:
ABSOLUTE EMC
ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada
absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com