


Field of application and characteristics

The **optoCAN-SW** system can be used for the optical transmission of single wire CAN signals with transmission rates of up to 33kbit/s (max. 83kbit/s). It consists of two identical battery supplied transceivers connected to each other with an optical fiber. With the optical transmission and the shielded case, the system is well equipped for EMI and EME tests.



Application

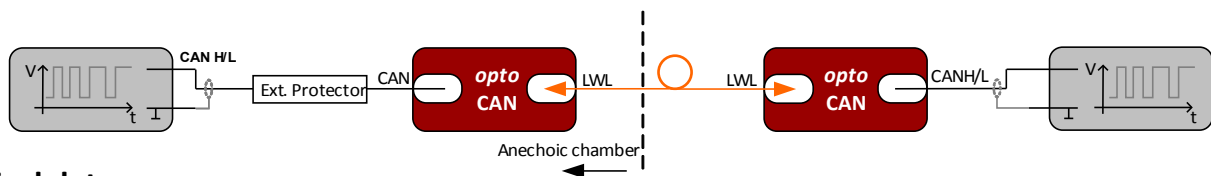

Technical data

Channels:	1
Connectors:	Sub-D 9 or custom made, termination switchable
Data rate:	up to 33kbit/s (max. 83kbit/s)
CAN- transceiver:	NCV7356
Vbat:	6 .. 13,5V; internal: 12V or external (switchable)
Power supply:	5 NiMH cells with 4 Ah; >30h; five-poled charge plug
Case dimensions:	136mm x 86mm x 65mm aluminum case with rubber protectors
Weight:	approx. 800g
Misc.:	optional external battery pack / supply available external filter depending on application 19" rack mount or ST optical fiber connectors available on request

Optical fiber

Connector / Type:	FSMA / duplex-multimode fiber 62,5/125µm
-------------------	--