



承儀電子股份有限公司
EMC Instruments corporation

DATA SHEET

EMC001340

Low Noise preamplifier

- Frequency Range : 10kHz-3.0GHz
- Noise Figure(dB max) : 6 dB max@25°C
- Nominal Gain(dB min) : 40dB@25°C
- Gain Flatness : +/- 1.5dB
- P1dB Compression Point : +14dBm minimum
- Input VSWR : 1.2:1 max
- Output VSWR : 1.4:1 max
- Operating Temperature : -20 to +60°C
- Power Requirements : 110 Vac / 230 Vac
- In/Out Connectors : 50ohm, N Female
- Size : 217mm*254mm*100mm
- Net Weight : 3Kg
- **Built AC input main power grounding detect circuit**



Sales Partner:




ABSOLUTE EMC Lic.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

www.emci.com.tw



Specification

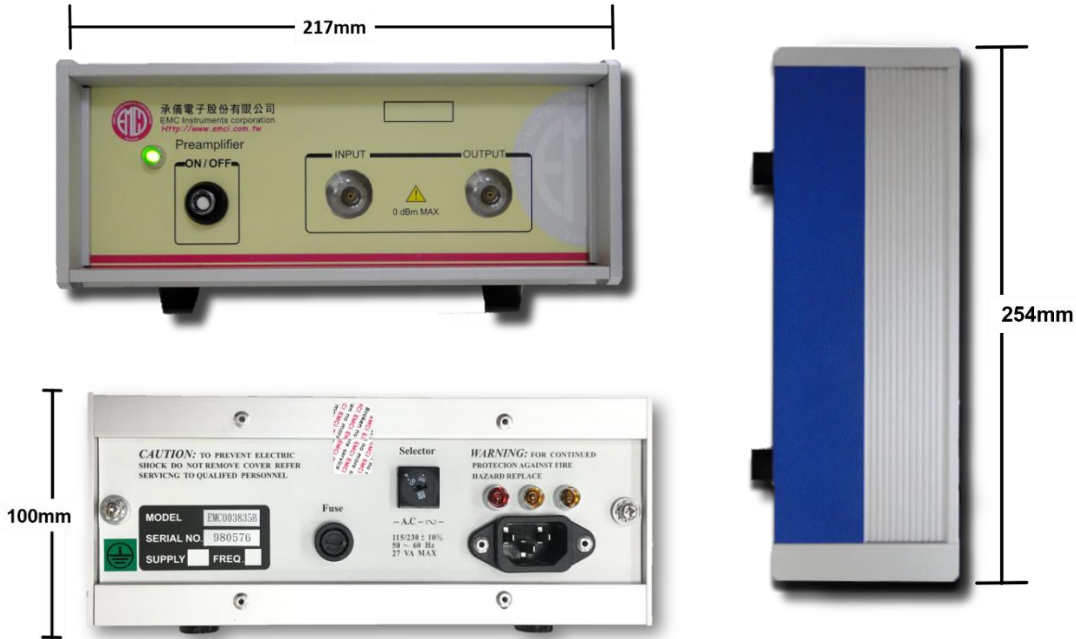


Frequency Range	10kHz-3.0GHz
Noise Figure (dB max)	6dB max@25°C
Nominal Gain	40dB @25°C
Gain Flatness (+/- dB max)	+/- 1.5 dB max
P1dB Compression Point:	+14dBm minimum
Input VSWR	1.2:1 max
Output VSWR	1.4:1 max
Operating Temperature	-20 to +60°C
Power Requirements	110 Vac / 230 Vac
In/Out Connectors	50ohm, N Female
Size	217mm*254mm*100mm
Net Weight	3Kg
Built AC input main power grounding detect circuit	<p> R Y Y OPEN GROUND ○ ● ○ OPEN NEUTRAL ○ ○ ○ OPEN LINE ○ ○ ○ LINE/GRD. REVERSE ● ○ ○ LINE/NEU. REVERSE ● ○ ○ CORRECT CONTACT ○ ○ ○ SERVICE ● ● ● </p> <p> WARNING: FOR CONTINUED PROTECTION AGAINST FIRE HAZARD REPLACE </p>
Optional	Pulse/ESD protector



承儀電子股份有限公司
EMC Instruments corporation

Low Noise preamplifier

EMC001340

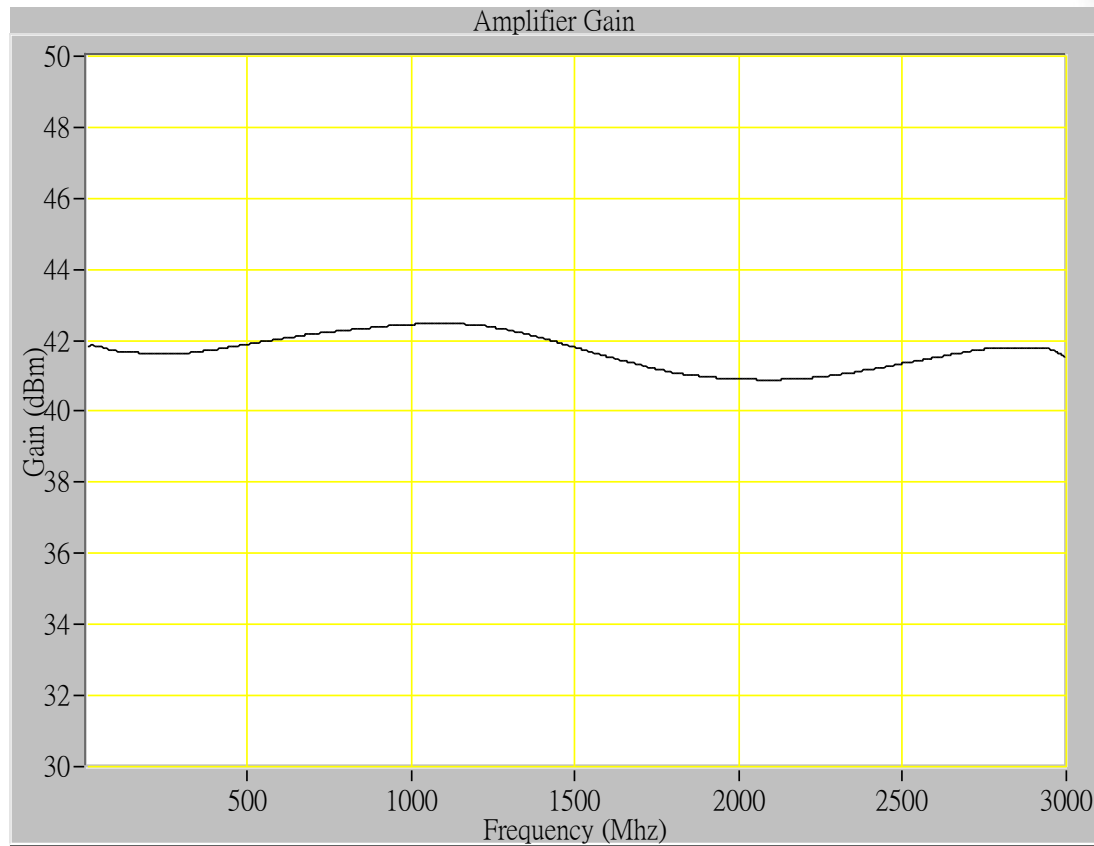

Sales Partner:



ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone: 703-774-7505
info@absolute-emc.com



承儀電子股份有限公司
EMC Instruments corporation

TEL : +886-3-3286-998

FAX : +886-3-3288-376

Mobile : 0937-214-592

E-mail : steven@emci.com.tw

桃園市龜山區文三三街38巷8號1樓

1F, No.8, Lane38, Wensan 3rd street, Kwei Shan Dist, Taoyuan City, Taiwan

www.emci.com.tw