



EMC Instruments corporation

DATA  
SHEET

# EMC330NSE

## Low Noise Preamplifier

- Frequency Range : 20~3000MHz
- Gain : 30dB min
- Noise Figure : 5dB max
- Gain flatness: +/- 1.5dB max
- P1dB output power: +15dBm min@2GHz
- Power Requirements : 110 Vac or 230Vac or 100~240Vac
- In/Out connectors : 50ohm, N Female / Male
- Size : 80(130)mm\*35mm\*30mm
- Net Weight : 210g
- Portable Version



Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com

[www.emci.com.tw](http://www.emci.com.tw)



EMC Instruments corporation

# Low Noise Preamplifier

## Specification



Frequency Range	20-3000MHz
Gain	30 dB min
Noise Figure (dB max)	5dB max
Gain flatness (+/- dB max)	+/-1.5 dB max
P1dB output power	+15dBm min@2GHz
Power Requirements	110 Vac or 230Vac or 100~240Vac
In/Out Connectors	50ohm, N Female / Male
Net Weight	210g
Size	80(130)mm*35mm*30mm

Sales Partner:




**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com



# Low Noise Preamplifier

EMC Instruments corporation

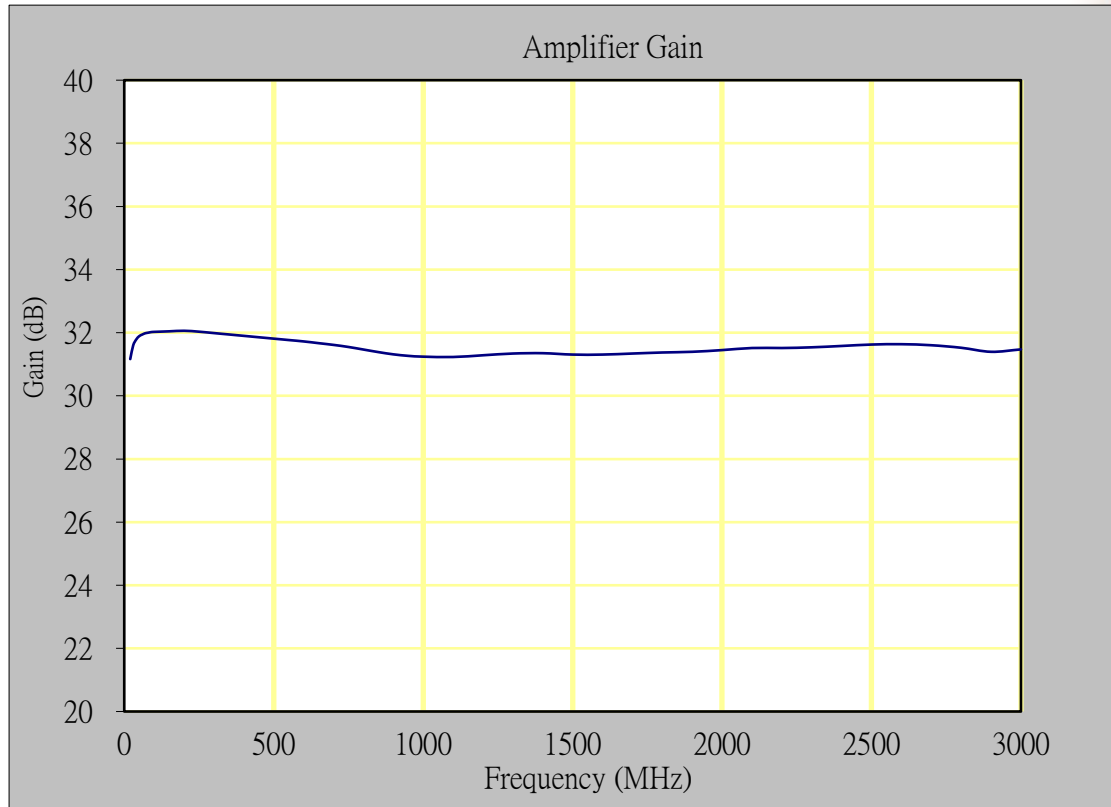

## Ordering information:

EMC330NSE-01-01 N Female (Input) - N Male (Output) - 110 Vac

EMC330NSE-01-02 N Female (Input) - N Male (Output) - 230 Vac

EMC330NSE-01-03 N Female (Input) - N Male (Output) - 100~240Vac

EMC330NSE-02-01 N Female (Input) - N Female (Output) - 110 Vac

EMC330NSE-02-02 N Female (Input) - N Female (Output) - 230 Vac

EMC330NSE-02-03 N Female (Input) - N Female (Output) -100~240Vac



EMC Instruments corporation

Sales Partner:



**ABSOLUTE EMC** LLC.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com