

## Pneumatic Antenna Stand ASP 1.0/1.8-10kg

### Technical data:

Antenna height manually adjustable	1.0 m - 1.8 m
Total mast height	1.9 m
Load capability	max. 10 kg (when balanced)
For long and heavy antennas, a counter weight is required to balancing the load.	
Depending on the distance of the antenna gravity center	
Material of antenna mast	Plastic and reinforced fiberglass
Mast cross section	60 mm x 60 mm
Base L x W	0.9 m x 0.75 m
Pneumatic polarization	0° / 90° (vert. / hor.)
Polarization time	approx. 3 s
Polarization drive	Pneumatic rotary actuator
Control	Solenoid valve
Nominal pressure	max. 6 bar
Voltage	110 VAC - 230 VAC, 50 Hz / 60 Hz single phase
Current consumption	max. 16 A
Control cable	Fiber optic lines
Remote control via	LAN (TCP/IP); (IEEE only with NCD)
Operating temperature	10°C-35°C
Total weight	approx. 30 kg
Accessories	Service manual
	3 m power supply cable
	15 m pneumatic air hose
	1 x pneumatic feed through

Movable with 4 wheels

Sales Partner:



**ABSOLUTE EMC** LLC.  
 Covering sales in North America  
 United States, Mexico, & Canada

absolute-emc.com  
 Phone: 703-774-7505  
 info@absolute-emc.com

### Brief description

The Pneumatic Antenna Stand **ASP 1.0/1.8-10kg** is specifically designed for measurements in electromagnetic absorption chambers at a fixed measurement height. The antenna height can be adjusted manually.


The antenna stand, with the exception of the rotary actuator, is fabricated from plastic (PVC and reinforced fiberglass).

Polarization occurs using compressed air. A solenoid valve located outside of the chamber regulates the compressed air flow.

Antenna Adapters for all commercially available antennas are available upon request.

All antennas during polarization rotate around their axis to eliminate any elevation errors.

The **LAN (TCP/IP) - interface** provides an additional control option for all functions, when operated with the **FCU<sup>3.0</sup>** or **NCD Controller**.

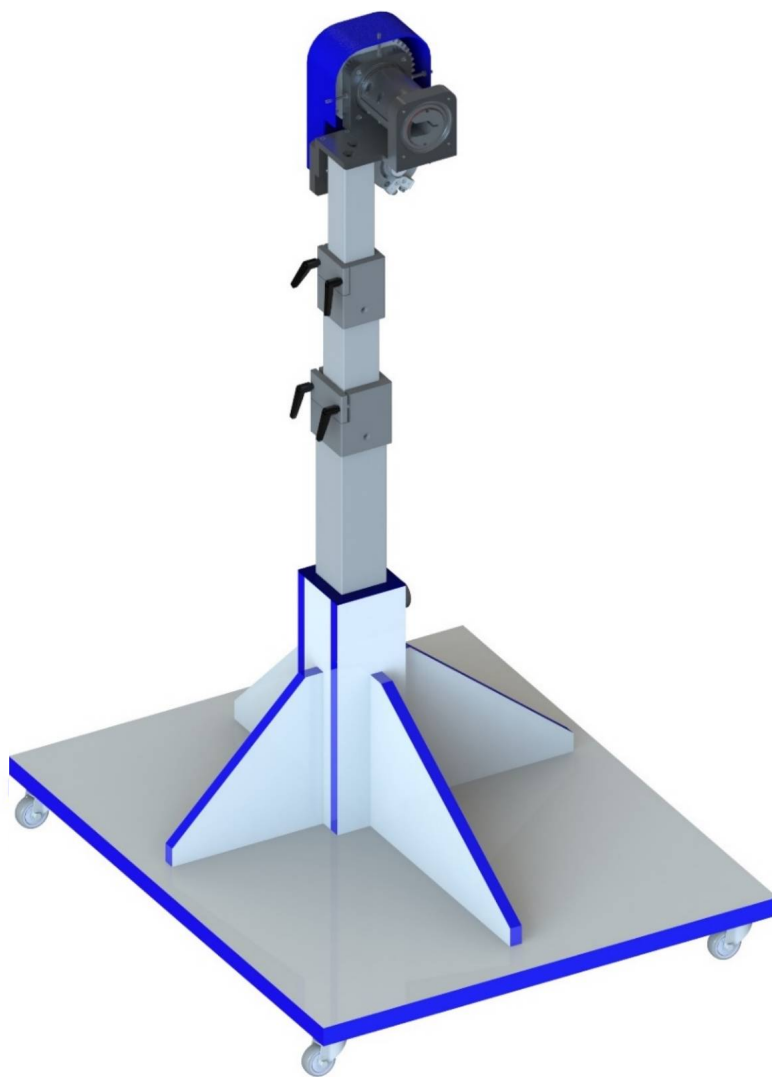

Information presented enclosed is subject to change as product enhancements are made regularly. Pictures included are for illustration purposes only and do not represent all possible configurations.

Phone: +49 (0)9606 923913-0  
Fax: +49 (0)9606 923913-29

eMail: [info@matur-gmbh.de](mailto:info@matur-gmbh.de)  
Web: [www.matur-gmbh.de](http://www.matur-gmbh.de)

Sales Partner:



**ABSOLUTE EMC** LLC.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone: 703-774-7505  
info@absolute-emc.com