

## Field Probe Positioner FPP2.3/1.5

### Technical data:

Field probe height automatic adjustment	0.8 m – 2.3 m
Total height	2.7 m
Horizontal range	1.5 m
Total length	2.3 m
Load capability	3 kg
Material	Plastic and reinforced fiberglass
Cross section	60 mm x 60 mm
Rail width	685 mm
Position speed adjustable in combination with FCU3.0	1.0 cm/s – 35 cm/s
in combination with NCD	1.0 cm/s – 20 cm/s
Positioning accuracy	+/- 0.5 cm
Motor	DC stepper motor
Support drive	2 toothed belts
Material of toothed belts	Kevlar reinforced (non-metallic)
Voltage	110 VAC – 230 VAC, 50 Hz / 60 Hz single phase
Current consumption	max. 16 A
Required RCD	300 mA
Control cable	Fibre optic lines
Remote control via	LAN (TCP/IP); (IEEE only with NCD)
Interference suppression	20 dB under limits DIN EN 55011:2018-05 class B
Operating temperature	10°C – 35°C
Total weight	approx. 60 kg
Accessories	Service manual 3 m power supply cable

Sales Partner:



Phone: +49 (0)9606 923913-0  
Fax: +49 (0)9606 923913-29

**ABSOLUTE EMC** LLC.  
Covering sales in North America  
United States, Mexico, & Canada

eMail: [info@maturo-gmbh.de](mailto:info@maturo-gmbh.de)  
Web: [www.maturo-gmbh.de](http://www.maturo-gmbh.de)


[absolute-emc.com](http://absolute-emc.com)  
Phone: 703-774-7505  
[info@absolute-emc.com](mailto:info@absolute-emc.com)

### Brief description

The biaxial Field Probe Positioner **FPP 2.3/1.5** is specifically designed for remote-controlled measurements at defined vertical areas. The system allows automatic measurements of the field homogeneity according to EN61000-4-3 and IEC61000-4-3.

Limit switches and the general mechanical design ensures reliable system operation. The FPP 2.3/1.5, with the exception of the drive unit, is fabricated from plastic (PVC and reinforced fibreglass). Metal parts are located only in the base plate and the drive mechanism (max. 0.3 m above ground level).

The **LAN (TCP/IP) - interface** provides an additional control option for all functions, when operated with the **FCU<sup>3.0</sup>** or **NCD Controller**.

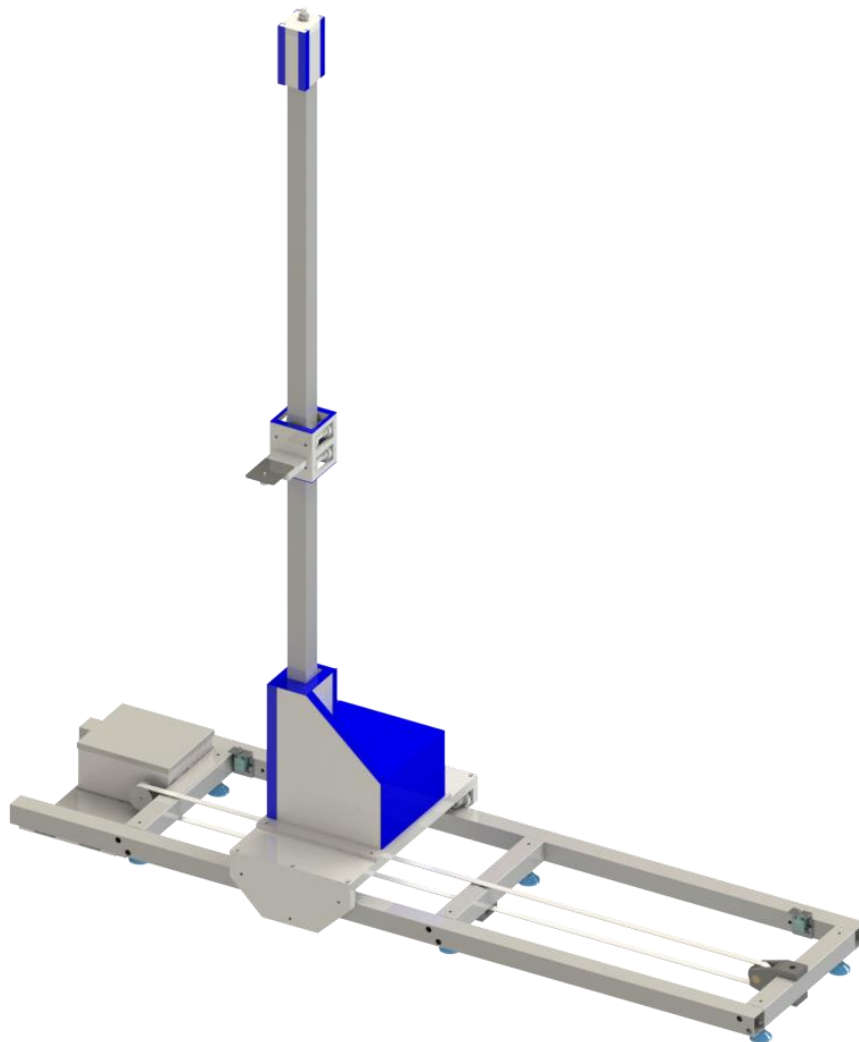

Information presented enclosed is subject to change as product enhancements are made regularly. Pictures included are for illustration purposes only and do not represent all possible configurations.

Sales Partner:



**ABSOLUTE EMC** LLC.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone: 703-774-7505  
info@absolute-emc.com

Phone: +49 (0)9606 923913-0  
Fax: +49 (0)9606 923913-29

eMail: info@maturo-gmbh.de  
Web: www.maturo-gmbh.de