

EMC1150

Low Noise Preamplifier



Sales Partner:



ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone: 703-774-7505
info@absolute-emc.com

Specifications

Frequency Range	9kHz - 1GHz
Noise Figure	1.8 dB (typ), 2.5 dB max
Gain	50 dB min
Gain Flatness	+/- 2.0 dB max
P1dB Compression Point	+13 dBm min
Operating Temperature	-20°C to +60°C
Input VSWR / Output VSWR	2.0 : 1 (typ) / 2.0 : 1
Power Requirements	120 Vac or 240 Vac
In / Out Connectors	50 ohm, N Female
Size (mm * mm * mm)	217 * 254 * 100
Net Weight	2.8 kg

**Built AC input main power
grounding detect circuit**

	R	Y	Y
OPEN GROUND	○	●	○
OPEN NEUTRAL	○	○	●
OPEN LINE	○	○	○
LINE/GRD. REVERSE	●	○	●
LINE/NEU. REVERSE	●	●	○
CORRECT	○	●	●
CONTACT SERVICE	●	●	●



Optional


**Pulse / ESD protector
Frequency : 10MHz - 6GHz**

Sales Partner:



ABSOLUTE EMC LLC.
 Covering sales in North America
 United States, Mexico, & Canada

absolute-emc.com
 Phone: 703-774-7505
 info@absolute-emc.com

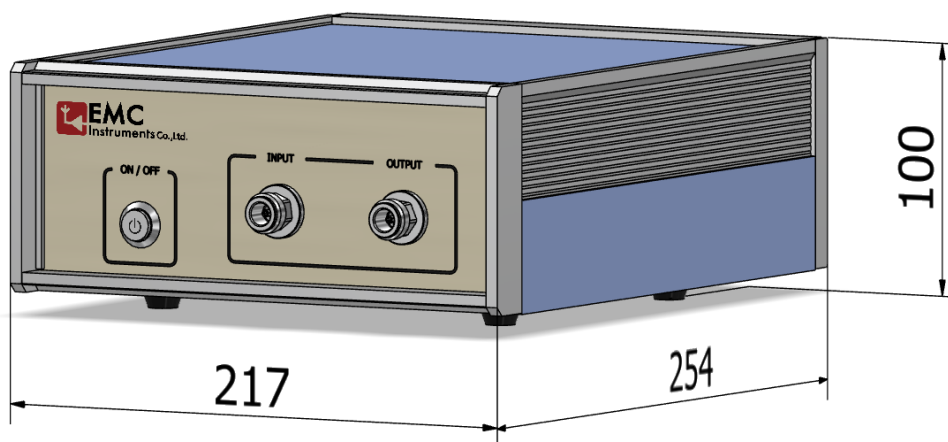

Preamplifier

Sales Partner:



ABSOLUTE EMC LLC.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone: 703-774-7505
info@absolute-emc.com



EMC Instruments Corporation

**Address: 1F., No. 8, Ln. 38, Wen 33rd St., Guishan Dist., Taoyuan City
333010, Taiwan**

TEL: +886-3-328-6998

FAX: +886-3-328-8376

Mobile: +886-937-214-592

E-mail: steven@emci.com.tw



Sales Partner:



ABSOLUTE EMC LLC.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone: 703-774-7505
info@absolute-emc.com