

# VBA1000-250S

80 - 1000MHz 250W Amplifier

- Rugged push-pull Silicon LDMOS technology
- Class A for maximum mismatch drive
- General linear power requirements




The **VBA1000-250S** is an 80-1000MHz high power amplifier, designed primarily for EMC applications.

The amplifier produces around 300W P1dB at the important VHF frequencies, and is housed in a compact 4U case. VBA1000-250S is intended for applications where an 18V/m field is required and incorporates measures to improve power delivery into high VSWR loads.

The amplifier can be controlled from either the front panel or remote control via the Ethernet, USB and GPIB interfaces. The digital interface system manages enabling and disabling the amplifier, monitoring power levels, monitoring power supply health, communicating with the control computer and implementing electrical interlocks. The keypad and display interface is used for monitoring amplifier state, power levels, interlock states etc. and for configuration options.

## Performance Chart

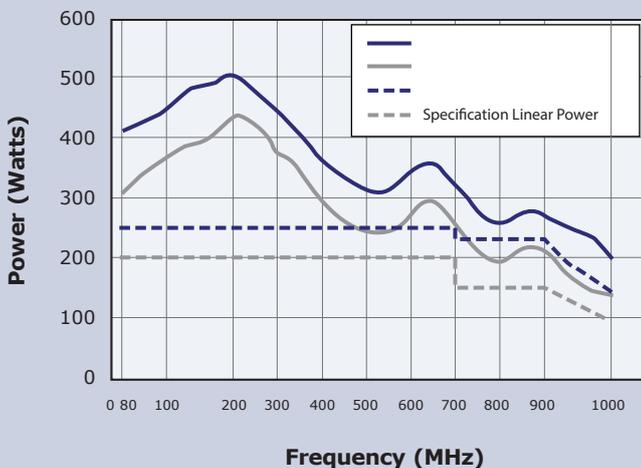

**See overleaf for technical specification**

Sales Partner:



**ABSOLUTE EMC** Ltd.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone: 703-774-7505  
info@absolute-emc.com

## Specifications

## VBA1000-250S

### Electrical

<b>Frequency Range (Instantaneous)</b>	80-1000MHz
<b>Output Power at 3dB Gain Compression</b>	250W 80MHz to 700MHz 230W 700MHz to 900MHz de rating slope of 0.9W/MHz 900MHz-1000MHz
<b>Output Power at 1dB Gain Compression</b>	200W 80MHz to 700MHz 150W 700MHz to 900MHz de rating slope of 0.5W/MHz 900MHz-1000MHz
<b>Gain</b>	56dB Min
<b>Third Order Intercept Point (see note 1)</b>	64dBm
<b>Gain variation with Frequency</b>	±3dB
<b>Harmonics at Rated Linear Power</b>	Better than -20dBc
<b>Output Impedance</b>	50 Ohms
<b>Stability</b>	Unconditional
<b>Output VSWR Tolerance (see note 2)</b>	Infinity:1
<b>Input VSWR</b>	2:1 (Max)
<b>Supply Voltage</b>	100 - 240V ac (+/- 10%)
<b>Supply Frequency Range</b>	45-63Hz
<b>Supply Power</b>	<1kVA (Max)
<b>Mains Connector</b>	IEC320

### Mechanical

<b>RF Connector Style</b>	Type N Female
<b>Safety Interlock</b>	Dual input, S/C and/or O/C to Mute
<b>Remote Control Interface</b>	USB/GPIB/Ethernet
<b>Dimensions</b>	19 inch, 4U Case, 500mm deep
<b>Mass</b>	18kg
<b>Operating Temperature Range</b>	0-40°C
<b>Case Style Options</b>	Rack mount with Front or Rear panel connectors Bench mount with Front panel connectors

### Regulatory Compliance

<b>Conducted and Radiated Emissions</b>	EN61326 Class A
<b>Conducted and Radiated Immunity</b>	EN61326:2013 Table 1
<b>Safety</b>	EN61010-1

### Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range



**Vectawave**  
Technology Limited  
Designers and Manufacturers of Solid State RF and Microwave Amplifiers

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com