


# VBA1000-350S

80MHz-1000MHz 350W Amplifier



VBA1000-350s Performance

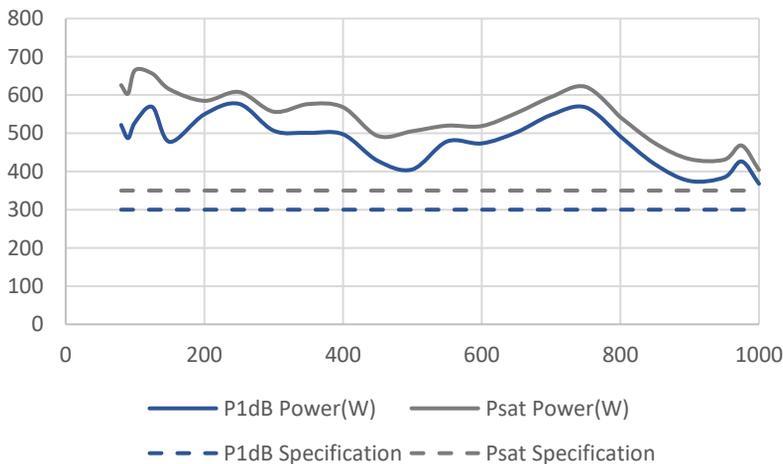

- Rugged push-pull Silicon LDMOS technology
- Class A for maximum mismatch drive
- General linear power requirements

The VBA1000-350S is a member of our family of 80-1000MHz high power amplifiers, designed primarily for EMC applications.

The amplifier is housed in a 6U case. VBA1000-350S incorporates measures to improve power delivery into high VSWR loads.

VBA1000-350S operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding antenna and test chamber requirements.

The amplifier can be controlled from either the front panel or remote control via the Ethernet, USB and GPIB interfaces. The digital interface system manages enabling and disabling the amplifier, monitoring power levels, communicating with the control computer and implementing electrical interlocks. The key pad and display interface is used for monitoring amplifier state, powerlevels, interlock states etc and for configuration options.

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com

# Technical Specification

## Electrical

Frequency Range (Instantaneous)	80-1000MHz
Saturated Power	350W minimum
Output Power at 1dB Gain Compression	300W minimum
Gain	56dB Min
Third Order Intercept Point (see note 1)	64dBm
Gain variation with Frequency	±3dB
Maximum input power	+10dBm
Harmonics at Rated Linear Power	Better than -20dBc
Output Impedance	50 Ohms
Stability	Unconditional
Output VSWR Tolerance (see note 2)	Infinity:1
Input VSWR	2:1 (Max)
Supply Voltage	240V ac (+/- 10%)
Supply Frequency Range	45-63Hz
Supply Power	<2kVA (Max)
Mains Connector	IEC320
Mechanical	
RF Connector Style	Type N Female
Safety Interlock	Dual input, S/C and/or O/C to Mute
Remote Control Interface	USB/GPIB/Ethernet
Dimensions	19 inch, 6U Case, 550mm deep
Mass	25kg
Operating Temperature Range	0-40°C
Case Style Options	Rack mount with Front or Rear panel connectors Bench mount with Front panel connectors
Regulatory Compliance	
Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:2013 Table 1
Safety	EN61010-1

## Notes

1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.

2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com

