


# VBA250-200

## 0.01-250MHz 200W Amplifier



### 0.01-250MHz 200W P1dB

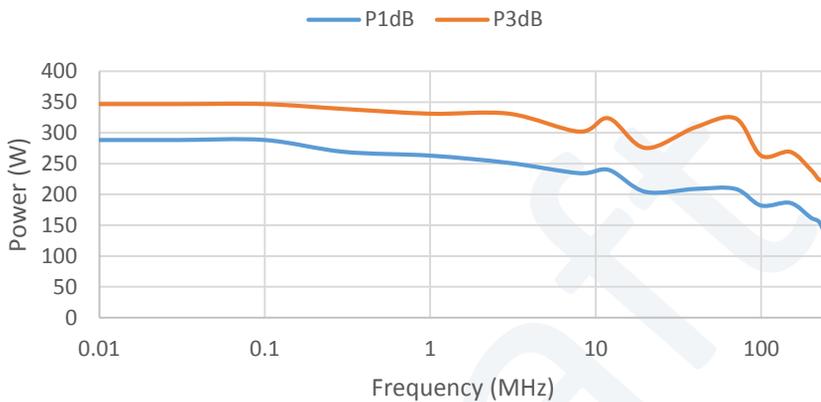

- Rugged push-pull MOSFET technology
- Class A for maximum mismatch drive

The VBA250-200 is a member of our family of 10kHz-250MHz high power amplifiers, designed primarily for EMC applications.

It is based on rugged push-pull MOSFET technology, for extra even order harmonic suppression.

The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding transducer requirements

See overleaf for technical specification.

VECTAWAVE TECHNOLOGY LIMITED  
UNIT D THE APEX ST CROSS BUSINESS PARK  
MONKS BROOK NEWPORT  
ISLE OF WIGHT PO30 5XW  
UNITED KINGDOM

Sales Partner:



**ABSOLUTE EMC** Ltd.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone: 703-774-7505  
info@absolute-emc.com

# Technical Specification

## Electrical

Frequency Range (Instantaneous)	10kHz-250MHz
Rated Output Power	250W Min (10kHz-80MHz),200W Min(80-250MHz)
Output Power at 1dB Gain Compression	200W Min (10kHz-80MHz),150W Min (80-225MHz)
Gain	54dB
Third Order Intercept Point (see note 1)	64dBm
Gain variation with Frequency	±2dB
Harmonics at 150W Output Power	Better than -20dBc
Output Impedance	50 Ohms
Stability	Unconditional
Output VSWR Tolerance (see note 2)	Infinity:1
Input VSWR	2:1 (Max)
Supply Voltage	100 - 240V ac (+/- 10%)
Supply Frequency Range	45-63Hz
Supply Power	<1kVA (Max)
Mains Connector	IEC 320

## Mechanical

RF Connector Style	Type N Female
Safety Interlock	Dual input, S/C and/or O/C to Mute
USB/GPIB Interface	Optional
Dimensions	19 inch, 4U Case, 500mm deep
Mass	18kg
Operating Temperature Range	0-40°C
Case Style Options	Rack mount with Front or Rear panel connectors Bench mount with Front panel connectors

## Regulatory Compliance

Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:1997 Table 1
Safety	EN61010-1

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com

## Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.