

VBA1000-1700/1200S

80MHz-1000MHz 1700/1200W Amplifier



Vectawave

- Rugged push-pull Silicon LDMOS technology
- Class A for maximum mismatch drive
- Linear power


The VBA1000-1700/1200S is a member of our family of 80-1000MHz high power amplifiers, designed primarily for EMC applications.

It is based on high power Silicon LDMOS technology, offering the user the benefits of high linearity, ruggedness and efficiency. The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding antenna and test chamber requirements.

The amplifier can be controlled from either the front panel or remote control via the Ethernet, USB and GPIB interfaces. The digital interface system manages enabling and disabling the amplifier, monitoring power levels, monitoring power supply health, communicating with the control computer, implementing electrical interlocks and has comprehensive diagnostic functions. The keypad and display interface is used for monitoring amplifier state, power levels, interlock states etc. and for configuration options.



Remote interface



Remote GUI



Smooth air exhausts



7/16 RF output

VECTAWAVE TECHNOLOGY LIMITED
UNIT D THE APEX ST CROSS BUSINESS PARK
MONKS BROOK NEWPORT
ISLE OF WIGHT PO30 5XW
UNITED KINGDOM

Sales Partner:



ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

Technical Specification


Electrical	
Frequency Range (Instantaneous)	80-1000MHz
Output Power at 3dB Gain Compression	1700W (80-300MHz) 1200W (300-1000MHz)
Output Power at 1dB Gain Compression	1200W (80-300MHz) 1000W (300-1000MHz)
Gain	61dB Min
Third Order Intercept Point (see note 1)	70dBm
Gain variation with Frequency	±2dB
Maximum input power	+13dBm
Harmonics at 1200W	Better than -20dBc
Spurious Emission Below Fundamental	-60dBc
Noise Figure	8dBm (typical)
Output Impedance	50 Ohms
Stability	Unconditional
Output VSWR Tolerance (see note 2)	Infinity:1
Input VSWR	1.5:1 (Max)
AC Supply (3 phase) option a) or b)	a) 200-240Vac, 4 pin plug (No neutral) b) 350-415Vac, 5 pin plug (With neutral)
Supply Frequency Range	45-63Hz
Supply Power	<6kVA (Max)
Mains Connector	EN60309 plug
Mechanical	
RF Connector Style	Type N female input, DIN7/16 female output
Safety Interlock	Dual input, S/C and/or O/C to Mute
Remote Control Interface	USB/GPIB/Ethernet
Dimensions	19 inch, 25U Rack, 800mm deep
Mass	160kg
Operating Temperature Range	0-40°C
Case Style	Rack with Rear panel connectors
Regulatory Compliance	
Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:2013 Table 1
Safety	EN61010-1



Option a) 200-240Vac, 4 pin plug (No neutral)



Option b) 350-415Vac, 5 pin plug (With neutral)

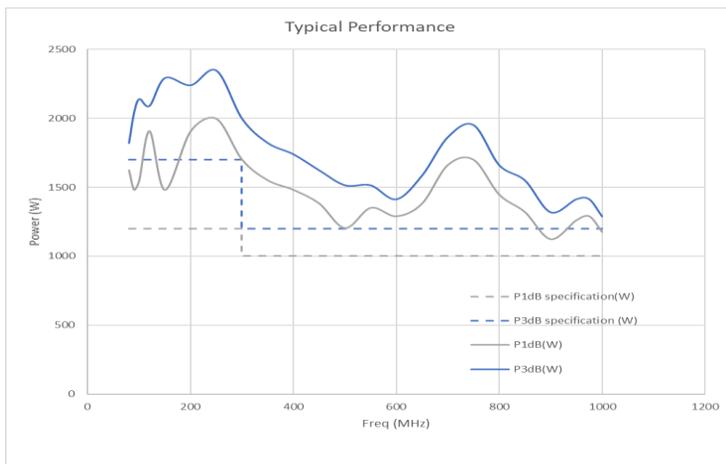

Sales Partner:



ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.

