

VBA230-80

150kHz - 230MHz 80W Amplifier

- Rugged push-pull MOSFET technology
- Class A for maximum mismatch drive
- General linear power requirements


The **VBA230-80** is a member of our family of 150kHz-230MHz high power amplifiers, designed primarily for EMC applications.

Like all our products of the VBA230 series, it is based on rugged push-pull MOSFET technology, for extra even order harmonic suppression.



The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding transducer requirements.

Performance Chart

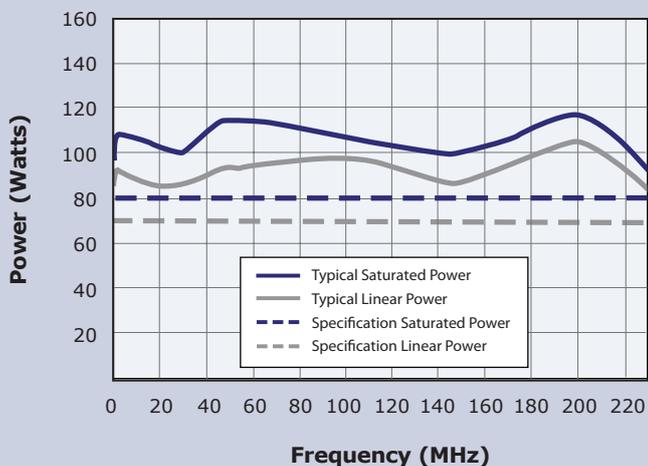

Choose **Vectawave** for high efficiency and performance in your regular power amplifier requirements.

See overleaf for technical specification

Sales Partner:



ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

Specifications

VBA230-80

Electrical

Frequency Range (Instantaneous)	0.15-230MHz
Rated Output Power	80W Min (90W typical)
Output Power at 1dB Gain Compression	70W Min (80W typical)
Gain	50dB Min
Third Order Intercept Point (see note 1)	58dBm
Gain variation with Frequency	±2dB
Harmonics at 70W Output Power	Better than -20dBc
Output Impedance	50 Ohms
Stability	Unconditional
Output VSWR Tolerance (see note 2)	Infinity:1
Input VSWR	2:1 (Max)
Supply Voltage	85-264V ac
Supply Frequency Range	47-63Hz
Supply Power	<400VA (Max)
Mains Connector	IEC320

Mechanical

RF Connector Style	Type N Female
Safety Interlock	2 x BNC, S/C and O/C to Mute
USB/GPIB Interface	Optional
Dimensions	19 inch, 3U Case, 440mm Deep
Mass	13kg
Operating Temperature Range	0-40°C
Case Style Options	Rack mount with Front or Rear panel connectors Bench mount with Front panel connectors

Regulatory Compliance

Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:1997 Table 1
Safety	EN61010-1

Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range



vectawave
Technology Limited
Designers and Manufacturers of Solid State RF and Microwave Amplifiers

Sales Partner:



ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com