


# VBA0742-70

## 700MHz-4200MHz 70W Amplifier

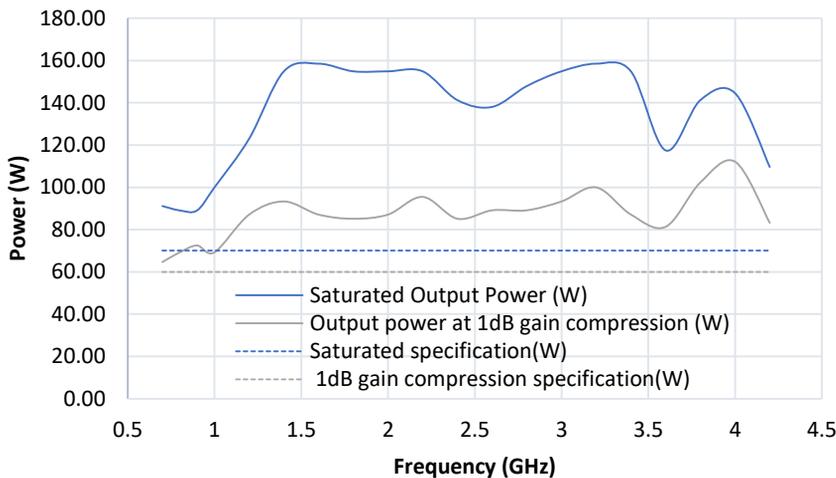

- GaN technology
- **Class A** for maximum mismatch drive
- Featuring high efficiency proprietary Quadrature Hybrid designs
- Dual coupled **sample ports**

The VBA0742-70 is a 700-4200MHz 70W high power amplifier designed for applications where a rugged Class A mismatch tolerant amplifier is required. The amplifier is based on high performance extra wideband GaN output stages and utilizes Vectawave proprietary Quadrature Hybrid combining techniques, minimizing loss for a more efficient solution.

The amplifier can be controlled from either the front panel or remote control via the Ethernet, USB and GPIB interfaces. The digital interface system manages enabling and disabling the amplifier, monitoring power levels, monitoring power supply health, communicating with the control computer and implementing electrical interlocks. The keypad and display interface is used for monitoring amplifier state, power levels, interlock states etc. and for configuration options. Forward and reflected power sample ports are accessible via the rear panel.

The amplifier operates in class A, with very low distortion and tolerance of 100% mismatch without foldback. See overleaf for technical specification.

VECTAWAVE TECHNOLOGY LIMITED  
UNIT D THE APEX ST CROSS BUSINESS PARK  
MONKS BROOK NEWPORT  
ISLE OF WIGHT PO30 5XW  
UNITED KINGDOM

Sales Partner:



ABSOLUTE EMC Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com

# Technical Specification

## Electrical

|  |                      |
|--|----------------------|
| <i>Frequency Range (Instantaneous)</i>                         | 700-4200MHz          |
| <i>Rated Output Power</i>                                      | 70W                  |
| <i>Output Power at 1dB Gain Compression</i>                    | 60W                  |
| <i>Gain</i>  | 49dB Min             |
| <i>Third Order Intercept Point</i> <small>(see note 1)</small> | 58dBm                |
| <i>Gain variation with Frequency</i>                           | ±3dB                 |
| <i>Harmonics at rated linear power</i>                         | Better than -20dBc   |
| <i>Output Impedance</i>  | 50 Ohms              |
| <i>Stability</i>   | Unconditional        |
| <i>Output VSWR Tolerance</i> <small>(see note 2)</small>       | Infinity any phase   |
| <i>Input VSWR</i>  | 2:1 (Max)            |
| <i>Supply Voltage</i>  | 100-240Vac (+/- 10%) |
| <i>Supply Frequency Range</i>                                  | 45-63Hz              |
| <i>Supply Power</i>  | 1.5kVA               |
| <i>Mains Connector</i>   | IEC320 –C20          |

## Mechanical

|                                    |   |
|------------------------------------|---|
| <i>RF Connector Style</i>          | <i>Input type N female, output N female</i>         |
| <i>Sample ports</i>                | <i>Forward N type female, Reverse N type female</i> |
| <i>Safety Interlock</i>            | <i>2 x BNC, S/C and O/C to mute</i>                 |
| <i>Communication Interface</i>     | <i>USB/GPIB/Ethernet</i>                            |
| <i>Dimensions</i>                  | <i>4U Rack, 600mm deep</i>                          |
| <i>Mass</i>                        | <i>15kg</i>   |
| <i>Operating Temperature Range</i> | <i>0-40°C</i>                                       |
| <i>Case Style Options</i>          | <i>Rack Mountable with rear panel connectors</i>    |

## Regulatory Compliance

|   |                             |
|---|-----------------------------|
| <i>Conducted and Radiated Emissions</i> | <i>EN61326 Class A</i>      |
| <i>Conducted and Radiated Immunity</i>  | <i>EN61326:2013 Table 1</i> |
| <i>Safety</i>                           | <i>EN61010-1</i>            |

### Notes

1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.

2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com

