
RF-U 5-2

H-Field Probe 30 MHz up to 3 GHz

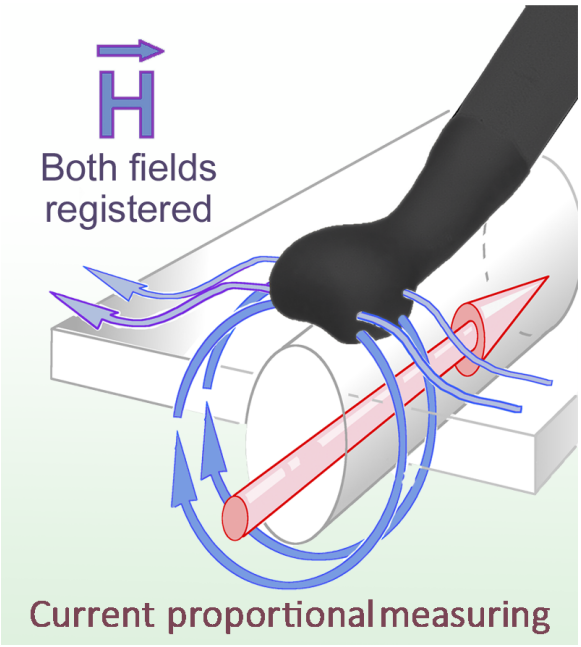

Short description

The RF-U 5-2 H-field probe is designed for detecting magnetical fields at broad conducting paths, cables, connectors, electronic components and their connections. The probe functions like a coupling clamp.


The RF-U 5-2 is a small and handy, passive near-field probe. For best coupling, the probe head should be positioned directly onto the component. Field lines from other sources entering the probe laterally or in a straight line are also detected. It has a current attenuating steath and its upper side is electrically shielded. It can be connected to a spectrum analyzer or an oscilloscope with a 50 Ω input. The H-field probe does not have an internal terminating resistance of 50 Ω.

Technical parameters


Frequency range	30 MHz ... 3 GHz
Resolution	≈ 5 mm
Probe head dimensions	≈ (6 x 6) mm
Connector - output	SMB, male, jack
Weight	15 g

Sales Partner:
ABSOLUTE EMC
ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada
absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

Frequency response [dBµV] / [dBµA/m]

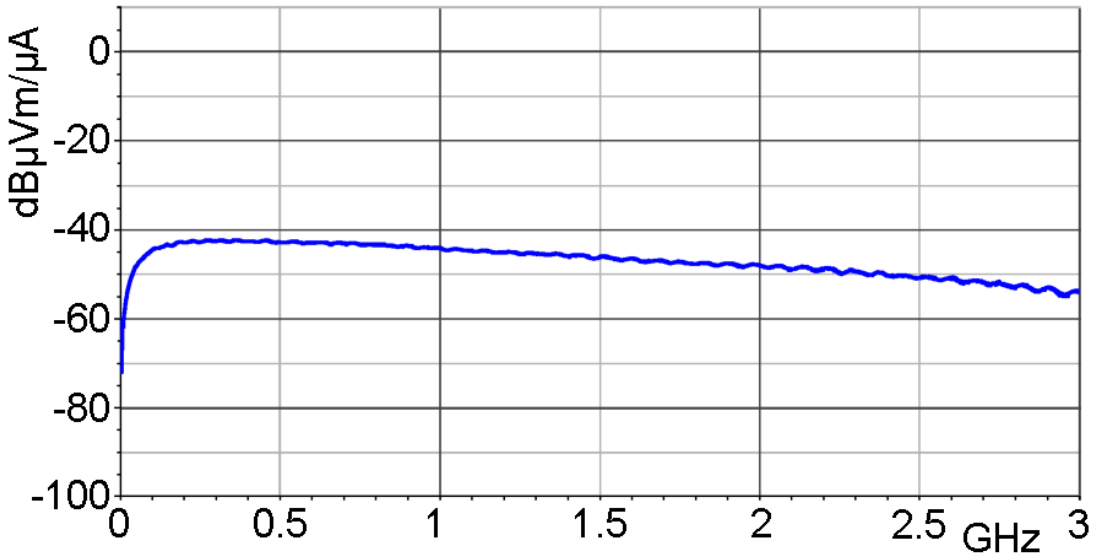


H-field correction curve [dBµA/m] / [dBµV]

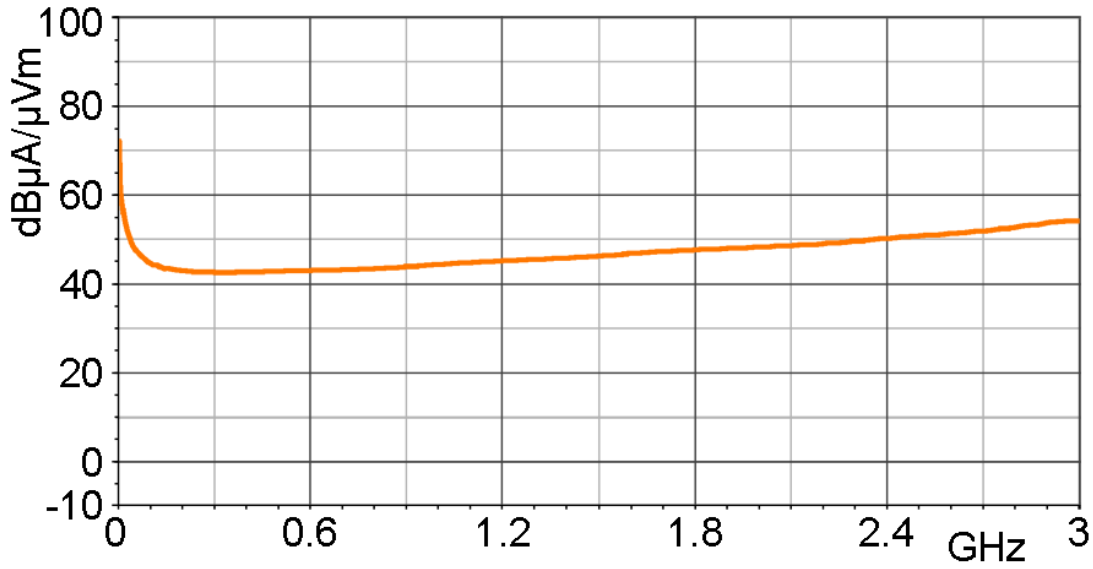


Sales Partner:
ABSOLUTE EMC
ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada
absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

Current correction curve [dBµA] / [dBµV]

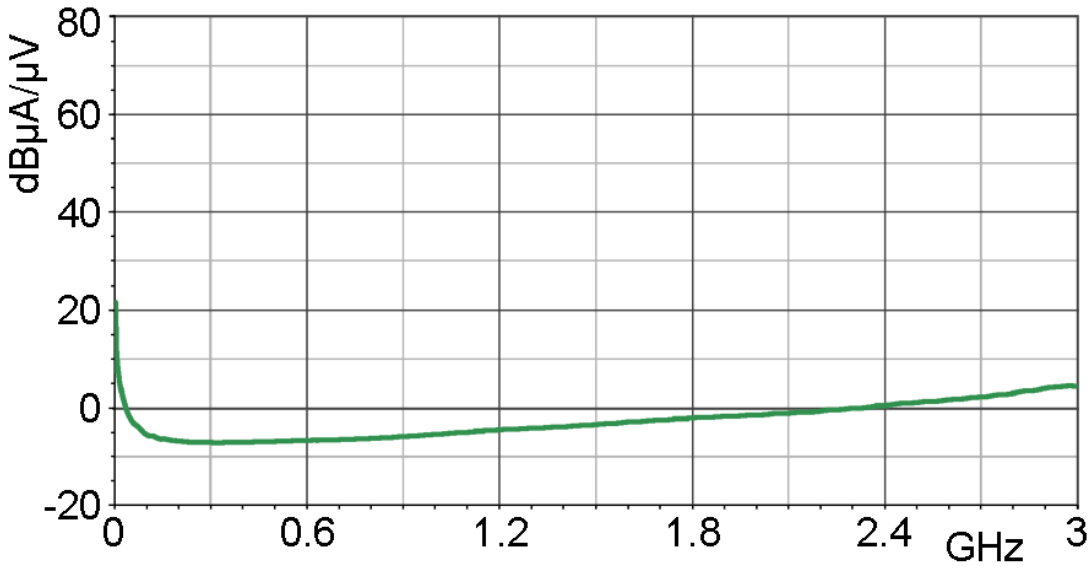

Measuring principles

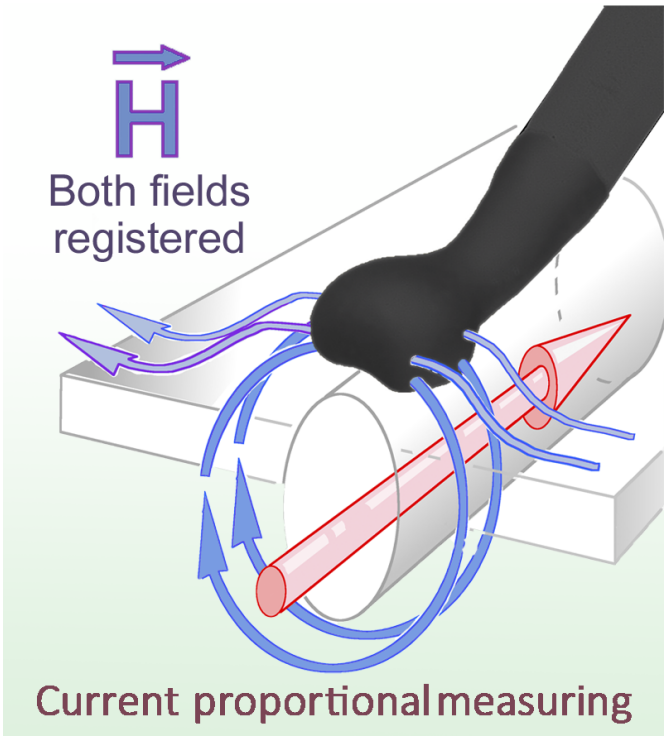

RF-U 5-2

H-Field Probe 30 MHz up to 3 GHz

LANGER EMV-Technik

Probe head



Sales Partner:
ABSOLUTE EMC

ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com