PA 2522 set

Preamplifier 10 MHz up to 22 GHz



Short description

The PA 2522 preamplifier was designed for the amplification of measuring signals, e.g. weak signals of near-field probes with high resolution. The PA 2522 is to be used with the 50 ohm input of a spectrum analyzer or an oscilloscope and is powered by the plug-in power supply. With the correct cable a near-field probe can be connected to the input of the preamplifier. Input and output of the PA 2522 are SMA connectors.

Scope of delivery

1x PA 2522, Preamplifier 10 MHz up to 22 GHz
1x NT FRI EU, Power Supply Unit
1x Case 5, System Case Near-Field Probes for 5 Probes

Technical parameters

Frequency range	10 MHz - 22 GHz
Gain	25 dB
Weight	400 g


Sales Partner:
ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada
absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com

PA 2522 set


Preamplifier 10 MHz up to 22 GHz

LANGER EMV-Technik

Measurement set-up with PA 2522

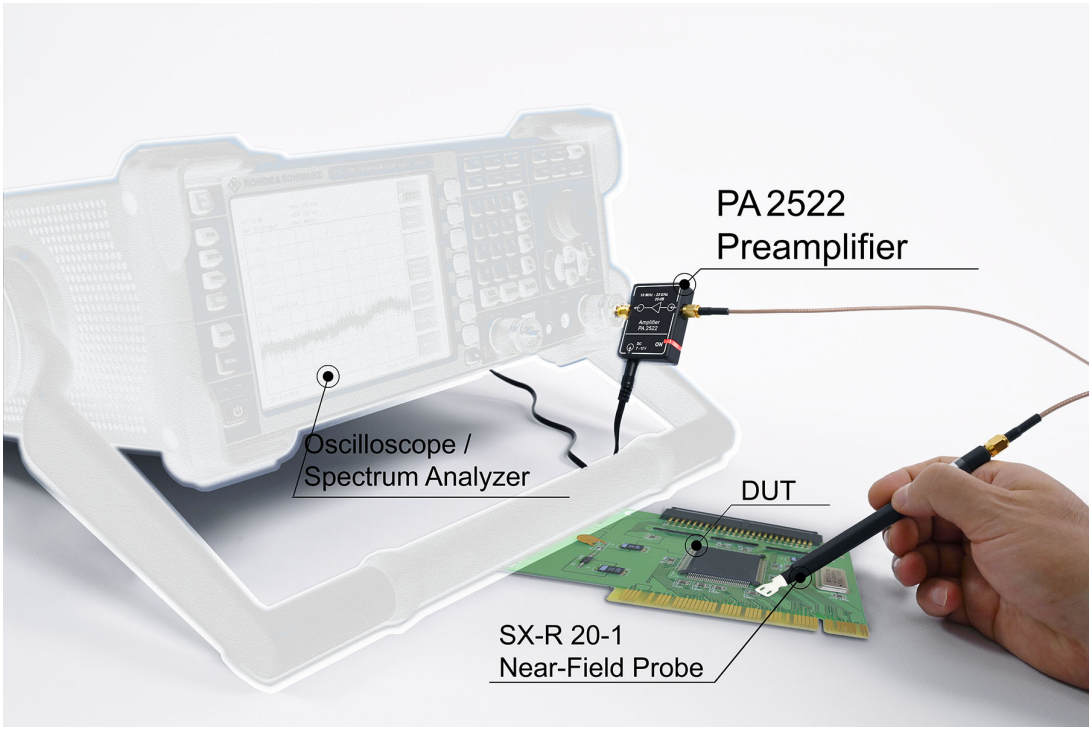

Scope of Delivery

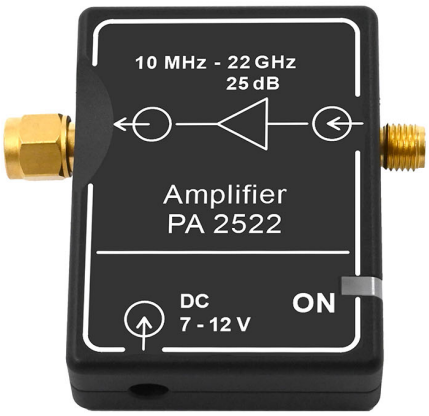



Sales Partner:
ABSOLUTE EMC

ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com