
PA 303 SMA set

Preamplifier 100 kHz up to 3 GHz

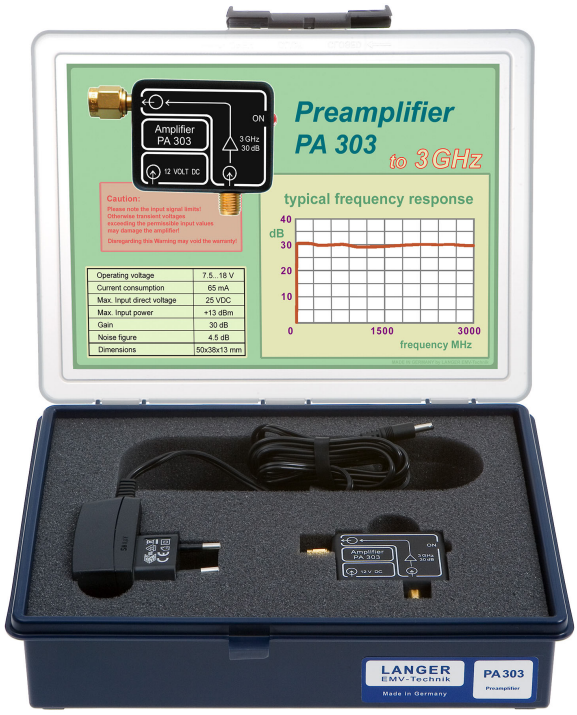

Short description

The PA 303 SMA preamplifier is designed for the amplification of measuring signals, e.g. weak signals of near-field probes with high resolution. The PA 303 is connected to the 50 ohm input of a spectrum analyzer or an oscilloscope and is powered by the wall-plug transformer. With the correct cable a near-field probe can be connected to the input of the preamplifier. The input and the output of PA 303 SMA use SMA connectors.

Scope of delivery

1x PA 303 SMA, Preamplifier 100 kHz up to 3 GHz
1x NT FRI EU, Power Supply Unit
1x A5 case, System case

Technical parameters

Frequency range	100 kHz - 3 GHz
Gain	30 dB
Weight	400 g
Sizes (L x W x H)	(24 x 19.5 x 6) cm

Sales Partner:
ABSOLUTE EMC
ABSOLUTE EMC Llc.
Covering sales in North America
United States, Mexico, & Canada
absolute-emc.com
Phone:703-774-7505
info@absolute-emc.com