

## RF CURRENT MONITORING PROBE

### 1 Introduction

The TBCP1-200 is a fixed aperture RF current monitoring probe, expanding the Tekbox product range of affordable EMC pre-compliance test equipment.

The probe has a 3dB bandwidth of approximately 200 MHz and is characterized and usable over the frequency range from 10kHz to 500 MHz.



Sales Partner:



ABSOLUTE EMC Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone:703-774-7505  
info@absolute-emc.com

## RF CURRENT MONITORING PROBE

The aperture of the RF current monitoring probe is 25 mm. Its transfer impedance is  $> 14$  dB Ohm in the range from 40 kHz to 200 MHz.

### 2 Specification

Characterized frequency range: 10 kHz to 500 MHz

Aperture diameter: 25 mm

Outside diameter: 76 mm

Height: 31 mm

Weight: 320 g

Connector type: N female

Transfer impedance: 3 to 17 dBΩ

Max. primary current (DC - 400 Hz): 80 A

Max. primary current (RF): 3 A

Max. core temperature: 125 °C

### 3 Typical transfer impedance

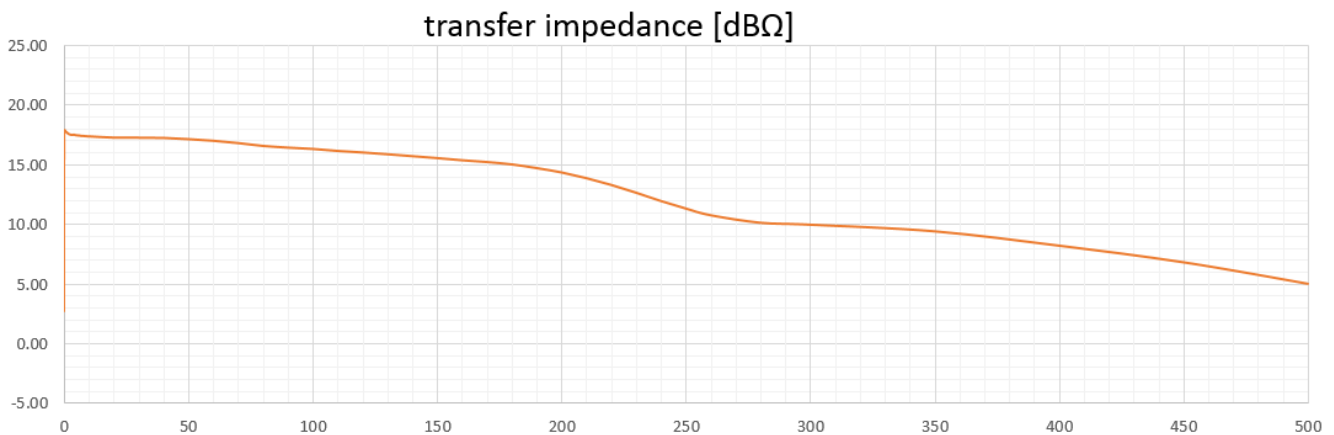


Figure1: Transfer impedance: 10 kHz to 500 MHz, linear

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone: 703-774-7505  
info@absolute-emc.com

## RF CURRENT MONITORING PROBE

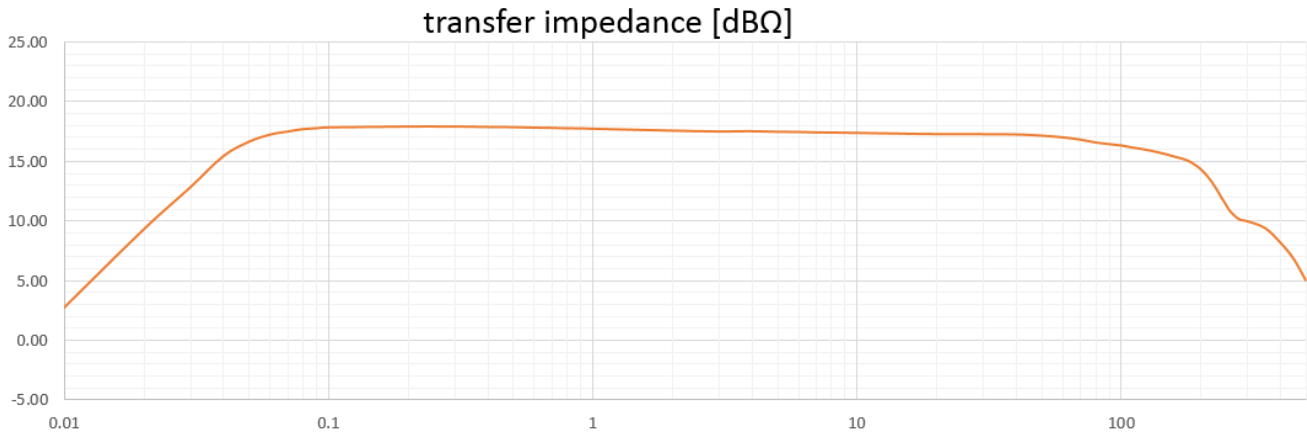


Figure2: Transfer impedance: 10 kHz to 500 MHz, logarithmic

### 4 Typical transfer impedance table

The table below shows typical transfer impedance data of a TBCP-200 current probe. Each current probe is delivered with its corresponding measurement protocol. This data can be used for the creation of a correction file for EMCview or similar EMC measurement software. The transfer impedance in dBΩ subtracted from the analyzer reading in dBμV gives the corrected reading in dBμA.

Refer to the application notes of EMCview on how to create a current probe correction file.

Frequency [MHz]	transfer impedance [dBΩ]	Frequency [MHz]	transfer impedance [dBΩ]
0.01	2.79	40	17.30
0.02	9.34	50	17.20
0.03	12.86	60	17.06
0.04	15.47	70	16.87
0.05	16.68	80	16.63
0.06	17.28	90	16.49
0.07	17.54	100	16.38
0.08	17.74	110	16.21
0.09	17.82	120	16.08
0.1	17.89	130	15.93
0.2	17.96	140	15.77
0.3	17.96	150	15.61
0.4	17.93	160	15.43
0.5	17.91	170	15.28
0.6	17.87	180	15.08
0.7	17.85	190	14.77
0.8	17.82	200	14.41
0.9	17.81	210	13.93

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone: 703-774-7505  
info@absolute-emc.com

## RF CURRENT MONITORING PROBE

1	17.78	220	13.36
2	17.62	230	12.71
3	17.55	240	12.01
4	17.57	250	11.38
5	17.52	260	10.82
6	17.51	280	10.19
7	17.47	300	10.03
8	17.46	350	9.47
9	17.44	400	8.27
10	17.43	450	6.88
20	17.33	500	5.08
30	17.32		

Table1: Transfer impedance: 10 kHz to 250 MHz

### 5 Ordering Information

Part Number	Description
TBCP1-200	Fixed aperture RF current monitoring probe, beech-wood box, calibration protocol

### 6 History

Version	Date	Author	Changes
V 1.0	5.05.2019	Mayerhofer	Creation of the document

www.tekbox.com

**TekBox Digital Solutions Vietnam Pte. Ltd.**

Factory 4, F5, Lot I-3B-1, Saigon Hi-Tech Park, Tan Phu Ward, District 9, Ho Chi Minh City, Vietnam

Sales Partner:



**ABSOLUTE EMC** Llc.  
Covering sales in North America  
United States, Mexico, & Canada

absolute-emc.com  
Phone: 703-774-7505  
info@absolute-emc.com