


VBA2060-300

2000MHz-6000MHz 300W Amplifier



Typical performance

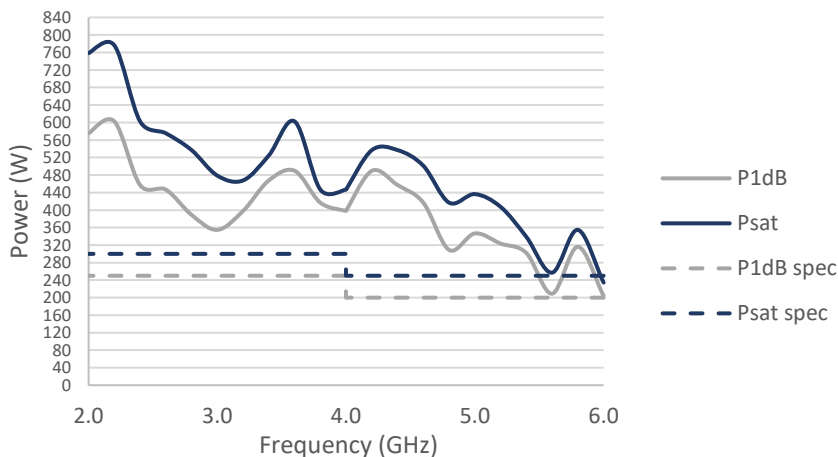

- GaN technology
- **Class A** for maximum mismatch drive
- Featuring high efficiency proprietary Quadrature Hybrid designs
- Dual coupled **sample ports**

The VBA2060-300 is a 2000-6000MHz 300W high power amplifier designed for applications where a rugged Class A mismatch tolerant amplifier is required.

The amplifier is based on high performance extra wideband GaN output stages and utilizes Vectawave proprietary Quadrature Hybrid combining techniques, minimizing loss for a more efficient solution.

The amplifier can be controlled from either the front panel or remote control via the Ethernet, USB and GPIB interfaces. The digital interface system manages enabling and disabling the amplifier, monitoring power levels, monitoring power supply health, communicating with the control computer and implementing electrical interlocks. The keypad and display interface is used for monitoring amplifier state, power levels, interlock states etc. and for configuration options.

Forward and reflected power sample ports are accessible via the rear panel.

The amplifier operates in class A, with very low distortion and tolerance of 100% mismatch without foldback.

See overleaf for technical specification.

Sales Partner:



ABSOLUTE EMC LLC.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone: 703-774-7505
info@absolute-emc.com

Technical Specification

Electrical

<i>Frequency Range (Instantaneous)</i>	2000-6000MHz
<i>Rated Output Power</i>	2000 – 4000MHz 300W 4000 – 6000MHz 250W
<i>Output Power at 1dB Gain Compression</i>	2000 – 4000MHz 250W 4000 – 6000MHz 200W
<i>Gain</i>	57dB Min
<i>Third Order Intercept Point</i> (see note 1)	64dBm
<i>Gain variation with Frequency</i>	±3dB
<i>Maximum input power</i>	+10dBm
<i>Harmonics at 200W output power</i>	Better than -20dBc
<i>Output Impedance</i>	50 Ohms
<i>Stability</i>	Unconditional
<i>Output VSWR Tolerance</i> (see note 2)	Infinity any phase
<i>Input VSWR</i>	2:1 (Max)
<i>Supply Voltage</i>	100-240Vac (+/- 10%)
<i>Supply Frequency Range</i>	45-63Hz
<i>Supply Power</i>	<3kVA
<i>Mains Connector</i>	IEC320 –C20

Mechanical

<i>RF Connector Style</i>	Input type N female, output N female
<i>Sample ports</i>	Forward N type female, Reverse N type female
<i>Safety Interlock</i>	2 x BNC, S/C and O/C to mute
<i>Communication Interface</i>	USB/GPIB/Ethernet
<i>Dimensions</i>	7U Rack, 600mm deep
<i>Mass</i>	40kg
<i>Operating Temperature Range</i>	0-40°C
<i>Case Style Options</i>	Rack Mountable with rear panel connectors

Regulatory Compliance

<i>Conducted and Radiated Emissions</i>	EN61326 Class A
<i>Conducted and Radiated Immunity</i>	EN61326:2013 Table 1
<i>Safety</i>	EN61010-1



Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range.

Sales Partner:



ABSOLUTE EMC Ltd.
Covering sales in North America
United States, Mexico, & Canada

absolute-emc.com
Phone: 703-774-7505
info@absolute-emc.com